


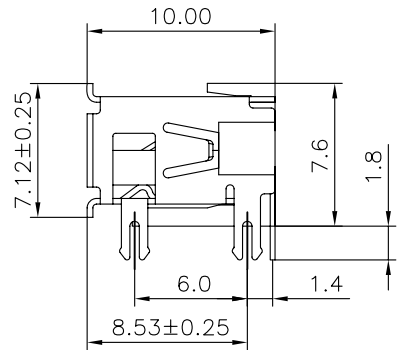



正式图 参考图 CUSTOMER DRAWING
The requirements of environmental protection
ROHS2 Halogen free

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
—	—	NEW VERSION	David Zhou	2014.01.09

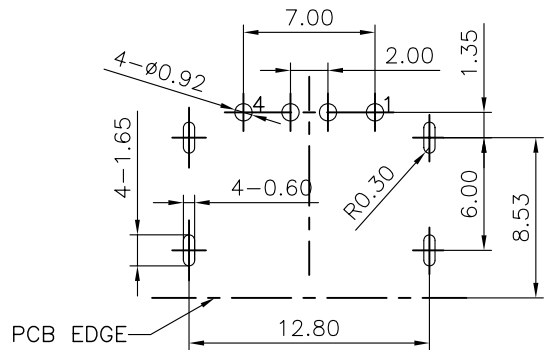

NOTES:
1.Rating:DC30V 1.5A;
2.Contact Resistance:≤30Milliohm
3.Insulation Resistance:≥1000Megohm;
4.Withstand Voltage:AC500V for one minute;
5.Insertion force:35N Max,Extraction force:10N min
6.Life test:1500 Cycles;
7.Operating Temperature:−55°C~+105°C 85%RH Max;
8.Storage Temperature:−55°C~+105°C 85%RH Max.



NO.	CODE	MATERIAL	COLOR	REMARK
3	CO	LCP UL94V-0	BLACK	RoHS2&H.F Fit
2	DO	PA66 30%G/F UL94V-0	BLACK	RoHS2 Fit
1	BO	PBT 30%G/F UL94V-0	BLACK	RoHS2 Fit

TABLE A : Plactical Material

P/N: UBXXXXX-XXXX-XXXXXXX

Model P/N

Plactical Material (Choose From Table A)


Housing Color
01:Black
02:Red
03:White
04:Yellow
40:Blue300C

Typ
20:usb2.0-A;

Product salt mist
A:Normal;
B:24Hours;

Packing
B:Tray; R:Tape reel;
 Remark
0:Normal;
 Shell Material
C:Brass C2680;
H:Spcc-sd;
K:S50C
D:COPPER ALLOY C5191

Plating Code
0:Bright Tin;
W:Matte Tin;
A:CONTACT AREA:GOLD,FALSH,SOLDER AREA:MATTE TIN80U*
B:CONTACT AREA:3U*GOLD,SOLDER AREA:MATTE TIN80U*



RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.20±0.05mm

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
3	SHIELD	1	Choose from P/N	Nickel Plated	X
2	TERMINAL	4	Copper Alloy	Selective Gold Plating.(Gold See Part No)	X
1	HOUSING	1	Choose from P/N	Choose from P/N item color	X

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	MODEL NAME:USB2.0短体 單層90度DIP MODEL No: UB1011W-XXXX-XXXXXXX	DRAWING: David Zhou CHECKED: David Zhou APPROVED:Jacky Lee DATE: 2014.01.09
UNIT:mm	SCALE:1:1 REVISION A0 SHEET 1/1	FILE: CD/LINGYANG DWG NO.UB1011W-A001
菱揚精密有限公司 Ling Yang Precision Co.,Ltd		