

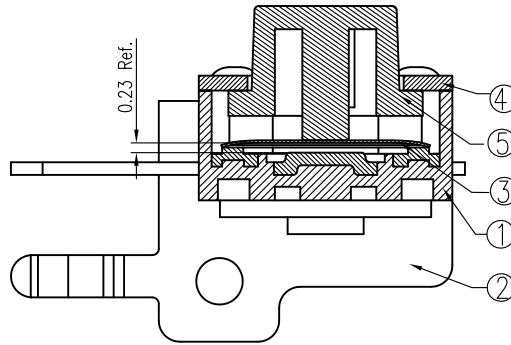





正式图 参考图
 CUSTOMER DRAWING
 The requirements of environmental protection
 ROHS2 Halogen free

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
—	—	INITIAL RELEASE	Carlyle Xu	2014.11.25

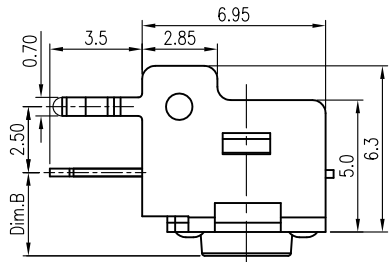

SECTION A-A
(X2)

- NOTES:
- 1.Rating: Voltage DC12V, Current 50mA Max;
 - 2.Contact Resistance:≤50Milliohm;
 - 3.Insulation Resistance:≥100 Megohm(DC100V);
 - 4.Withstand Voltage:AC250V for 1Minute;
 - 5.Full Travel:0.25±0.1mm;
 - 6.Operating Temperature:-20°C~+85°C;
 - 6.Storage Temperature:-30°C~+85°C.

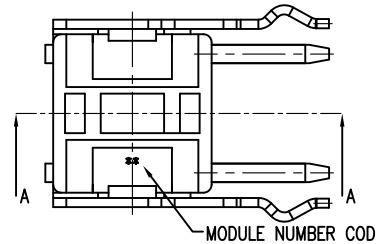

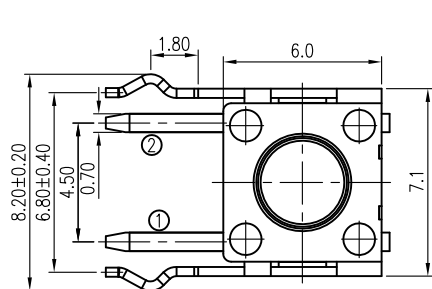


2	D6	PA66 30%G/F UL94V-0	PA66 30%G/F UL94V-0	RoHS2&H.F Fit
1	D0	PA66 30%G/F UL94V-0	PA66 30%G/F UL94V-0	RoHS2 Fit
NO.	CODE	HOUSING MATERIAL	BUTTON MATERIAL	REMARK

TABLE A : Plastical Material

CHOOSE	A001	A002	A003	A004	A005	A006	A007	A008	A009	A010	A011	A012	A013
DiM B/mm	3.15	3.35	3.85	4.35	4.85	5.85	6.85	7.85	8.35	8.85	9.35	9.85	10.85
Dim A/mm	4.3	4.5	5.0	5.5	6.0	7.0	8.0	9.0	9.5	10.0	10.5	11.0	12.0
CHOOSE	A014	A015	A016	A017	A018								
DiM B/mm	11.85	15.85											
Dim A/mm	13.0	17.0											

TABLE B(Height Dim)



CIRCUIT DRAWING

P/N:

TC1106E-XXXX-XXXXXXXX

Model P/N

Plastical Material
(Choose From Table A)

Button Color
 01:Black
 02:Red

Packing
 B:Tray; R:Tape reel;
 T:Tube; P:PE Bag
 Chocolate:
 0:100gf 6:160gf
 8:180gf A:260gf
 Typ
 H:Horizontal; V:Vertical;
 Height of the key(Dim A)
 (Choose from TABLE B)

5	Cover	1	Mn	Plating Nickel	X
4	Spring	1	Phosphor bronze	Plating Silver	X
3	Button	1	Choose from table A	Choose from table P/N color item.	X
2	Contact	1	Brass	Plating Silver	X
1	Housing	1	Choose from table A	Black	X
NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0'	MODEL NAME:TACT SWITCH MODEL No: TC1106E-XXXX-XXXXVXX	DRAWING: Carlyle Xu CHECKED: David zhou
	SCALE 1:1 REVISION AO SHEET 1/1	APPROVED:Jacky Lee DATE: 2014.11.25
UNIT:mm	菱揚精密有限公司 Ling Yang Precision Co.,Ltd	FILE: F/LINGYANG DWG NO. TC1106E-A001