

2	D6	P66 30%G/F UL94V-0	P66 30%G/F UL94V-0	RoHS2&H.F Fit
1	D0	P66 30%G/F UL94V-0	P66 30%G/F UL94V-0	RoHS2 Fit
NO.	CODE	HOUSING MATERIAL	BUTTON MATERIAL	REMARK

TABLE A : Plactical Material

CHOOSE		
CODE	0430	0500
DIM A/mm	4.3	5.0

TABLE B

P/N:

TC1702W-XXXX-XXXXXXX

Model P/N

Plactical Material  
(Choose From Table A)

Button Color

- 01:Black
- 02:Red
- 03:White
- 04:Yellow
- 08:Gray

Packing

- B:Tray;  R:Tape reel;
- T:Tube;  P:PE Bag

Chocolate:

- 0:100g  6:160g;
- 8:180g  A:260g.


Typ

s:SMT

Height of the key

(Choose from TABLE B)

MODULE NUMBER CODE

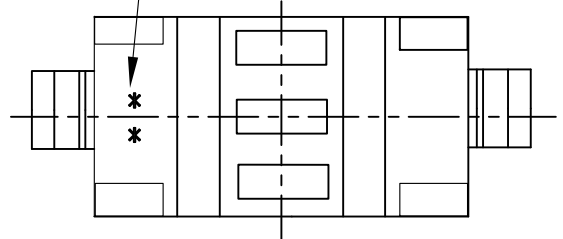

- NOTES:
- 1.Rating: Voltage DC12V, Current 50mA Max;
  - 2.Contact Resistance:≤50Milliohm;
  - 3.Insulation Resistance:≥100 Megohm(DC100V);
  - 4.Withstand Voltage:AC250V for 1Minute;
  - 5.Full Travel:0.25±0.1mm;
  - 5.Operating Temperature:-20°C~+85°C;
  - 6.Storage Temperature:-30°C~+85°C.

Tolerance	MODEL NAME:TACT SWITCH	DRAWING: Miao Xue Ting
X.X ±0.30	MODEL No:TC1702W-XXXX-XXXXSXX	CHECKED: Zeng Yu
X.XX ±0.20	SCALE:1:1	APPROVED: Xiao Zhong Bo
X.XXX ±0.10		REVISION SHEET
Angle ±3.0°	A0	DATE: 2014.03.31.
UNIT:mm	菱揚精密有限公司 Ling Yang Precision Co.,Ltd	FILE: XZB/LINGYANG DWG NO.TC1702W-A001