


TABLE A: Schematic And Code

NO.	CODE	MATERIAL	REMARK
2	B4	PBT 30%/F UL94V-0	RoHS2HL F Fit
1	B0	PBT 30%/F UL94V-0	RoHS2 Fit

TABLE B: Plactical Material

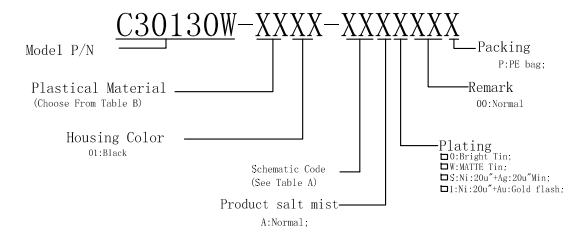

- NOTES:
 1. Rating:DC30V 0.5A;
 2. Contact Resistance:≤30Milliohm, After Test:≤50Milliohm;
 3. Insulation Resistance:≥100Megohm (DC500V);
 4. Withstand Voltage:AC500V for 1Minute;
 5. Insertion and Extraction force:3~30N;
 6. Life test:5000 Cycles.
 7. Operating Temperature:-20 °C~+70 °C 85%RH Max;
 8. Storage Temperature:-40 °C~+85 °C 85%RH Max.

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
④	Tip spring	2	1	Stainless steel 0.25t	CHOOSE FROM P/N PLATING CODE
③	Ring spring	3	1	Phosphor bronze 0.25t	CHOOSE FROM P/N PLATING CODE
②	Earth spring	1	1	Phosphor bronze 0.25t	CHOOSE FROM P/N PLATING CODE
①	Housing	1	1	CHOOSE FROM TABLE B	CHOOSE FROM P/N HOUSING COLOR

Tolerance X.X +0.30 X.XX +0.20 X.XXX +0.10 Angle +3.0°	MODEL NAME:3.5PHONE JACK MODEL No:C30130W-XX01-03AX00P	DRAWING: Miao Xue Ting CHECKED: Zeng Yu
UNIT:mm	SCALE:1:1 REVISION AO	SHEET 1/1 APPROVED: Xiao ZhongBo DATE: 2013-12-24
菱揚精密有限公司 Ling Yang Precision Co., Ltd		FILE: XZB/LINGYANG DWG NO. C30130W-A001