


TABLE A: Schematic And Code

NO.	CODE	MATERIAL	REMARK
2	L3	PA10T 30%/F UL94V-0	RoHS2HL F Fit
1	L0	PA9T 30%/F UL94V-0	RoHS2 Fit

TABLE B: Plastical Material

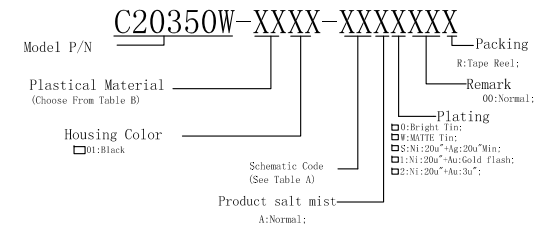

- NOTES:
1. Rating:DC30V 0.5A;
 2. Contact Resistance:≤30Milliohm, After Test:≤50Milliohm;
 3. Insulation Resistance:≥100Megohm (DC500V);
 4. Withstand Voltage:AC500V for 1minute;
 5. Insertion and Extraction force:3~30N;
 6. Life test:5000 Cycles.
 7. Operating Temperature:-20° C~+70° C 85%RH Max;
 8. Storage Temperature:-40° C~+85° C 85%RH Max.

RECOMMENDED P.C.B. LAYOUT
 UNSPECIFIED TOLERANCE:±0.05
 (TOP VIEW)

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
⑤	Ring spring	4	1	Stainless steel 0.20t	CHOOSE FROM P/N PLATING CODE
④	Ring spring	3	1	Stainless steel 0.20t	CHOOSE FROM P/N PLATING CODE
③	Tip spring	2	1	Phosphor bronze 0.25t	CHOOSE FROM P/N PLATING CODE
②	Earth spring	1	1	Phosphor bronze 0.20t	CHOOSE FROM P/N PLATING CODE
①	Housing	1	1	CHOOSE FROM TABLE B	CHOOSE FROM P/N HOUSING COLOR

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	MODEL NAME:2.5PHONE JACK MODEL No:C20350W-XXXX-XXXXXXXR	DRAWING: Miao Xue Ting CHECKED: Zeng Yu
UNIT:mm	REVISION SHEET SCALE:1:1 A0 1/1	APPROVED:Xiao ZhongBo DATE: 2013-12-24
菱揚精密有限公司 Ling Yang Precision Co., Ltd		FILE: XZB/LINGYANG DWG NO. C20350W-A001