


TABLE A: Schematic And Code

NO.	CODE	MATERIAL	REMARK
2	L3	PA10T 30%/F UL94V-0	RoHS2RH. F Fit
1	L0	PA9T 30%/F UL94V-0	RoHS2 Fit

TABLE B: Plactical Material

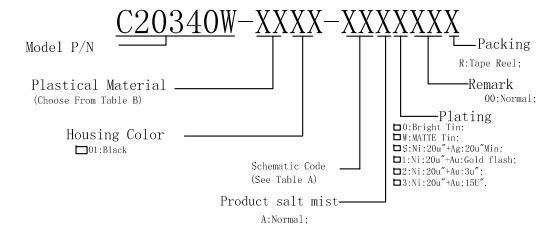

NOTES:

- Rating:DC30V 0.5A;
- Contact Resistance: ≤30Milliohm, After Test: ≤50Milliohm;
- Insulation Resistance: ≥100Megohm(DC500V);
- Withstand Voltage:AC500V for 1Minute;
- Insertion and Extraction force:3~30N;
- Life test:5000 Cycles.
- Operating Temperature:-20° C~+70° C 85%RH Max;
- Storage Temperature:-40° C~+85° C 85%RH Max.

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
⑤	Shunt terminal	4	1	Stainless steel 0.20t	CHOOSE FROM P/N PLATING CODE
④	Ring spring	3	1	Stainless steel 0.20t	CHOOSE FROM P/N PLATING CODE
③	Tip spring	2	1	Phosphor bronze 0.30t	CHOOSE FROM P/N PLATING CODE
②	Earth spring	1	1	Phosphor bronze 0.30t	CHOOSE FROM P/N PLATING CODE
①	Housing	1	1	CHOOSE FROM TABLE B	CHOOSE FROM P/N HOUSING COLOR

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	MODEL NAME:2.5PHONE JACK MODEL No:C20340W-XXXX-XXXXXXXR	DRAWING: Miao Xue Ting CHECKED: Zeng Yu
UNIT:mm	SCALE:1:1 REVISION SHEET A0 1/1	APPROVED:Xiao ZhongBo DATE: 2013-12-24
Ling Yang Precision Co., Ltd		FILE: XZB/LINGYANG DWG NO. C20340W-A001