
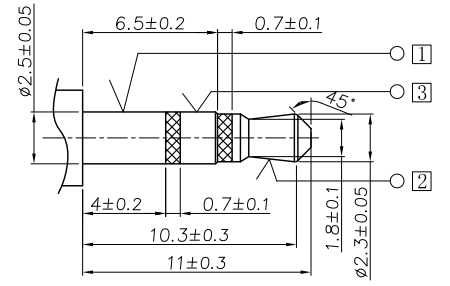



RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)



Matching Plug

Model No.	A0	B0	C0
Schematic code			

TABLE A: Schematic And Code

NO.	CODE	MATERIAL	REMARK
2	B4	PBT 30%G/F UL94V-0	RoHS2&H.F Fit
1	B0	PBT 30%G/F UL94V-0	RoHS2 Fit

TABLE B : Plastical Material

- NOTES:
- Rating: DC30V 0.5A;
 - Contact Resistance: ≤30Milliohm, After Test: ≤50Milliohm;
 - Insulation Resistance: ≥100Megohm(DC500V);
 - Withstand Voltage: AC500V for 1Minute;
 - Insertion and Extraction force: 3~30N;
 - Life test: 5000 Cycles.
 - Operating Temperature: -20°C~+70°C 85%RH Max;
 - Storage Temperature: -40°C~+85°C 85%RH Max.

P/N:

C2008HS-XXXX-XXXXXXX

- Model P/N
- Plastical Material (Choose From Table B)
- Housing Color (□01:Black)
- Schematic Code (See Table A)
- Packing (□B:Tray; □R:Tape reel; Remark 00:Normal;)
- Plating (□A:Ag 5u")
- Product salt mist (□A:Normal; □B:24Hours; □C:48Hours;)

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
⑤	Shunt terminal	④	1	Brass,t0.25	X
④	Ring Spring	③	1	Phosphor Bronze,t0.25	X
③	Tip Spring	②	1	Beryllium bronze, 0.25t	X
②	Earth Spring	①	1	Phosphor Bronze,t0.25	X
①	Housing		1	CHOOSE FROM TABLE B	X
				CHOOSE FROM P/N HOUSING COLOR	

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	MODEL NAME:2.5PHONE JACK MODEL No:C2008HS-XXXX-XXXXXXX	DRAWING: Carlyle Xu CHECKED: David Zhou APPROVED: Jacky Lee DATE: 2014-09-30
UNIT:mm	SCALE:3:1 REVISION A0 SHEET 1/1	FILE: F/LINGYANG DWG NO. C2008HS-A001

菱揚精密有限公司
Ling Yang Precision Co.,Ltd