
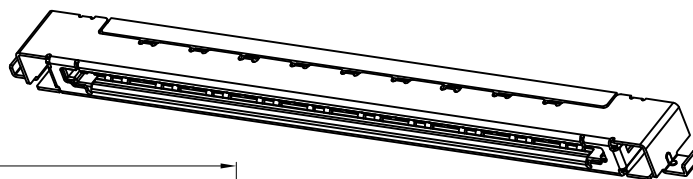
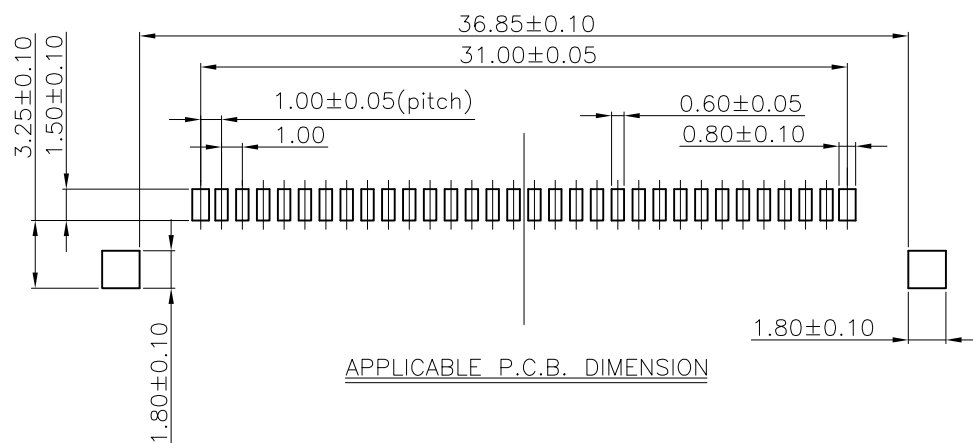
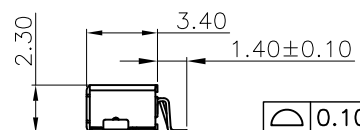
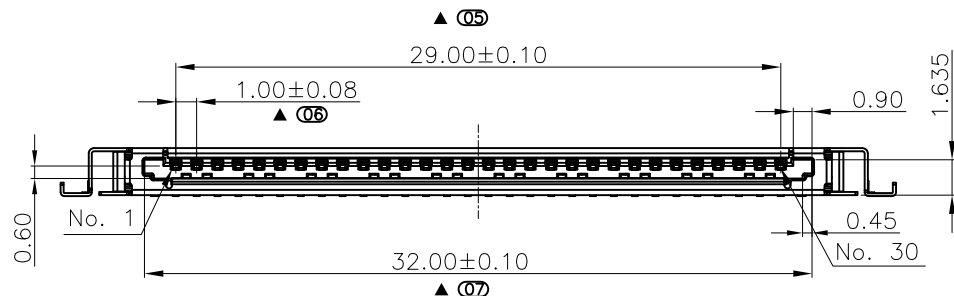


正式图 参考图

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
—	—	INITIAL RELEASE	Peter Wang	2018.06.06

NOTES: MATERIAL&FINISH

- HOUSING:HIGH THERMOPLASTIC;COLOR:BEIGE
- TERMINAL:COPPER ALLOY.t=0.15mm  
PLATING:CONTACT AREA GOLD 3u"Min.  
SOLDER AREA MATTE TIN (LEAD FREE) 75u" MIN.,  
OVERALL WITH 50~150u"NICKEL UNDER PLATED.
- SHELL:COPPER ALLOY t=0.15mm  
PLATING:SOLDER AREA PLATED WITH GOLD FLASH,  
10u"~80u"NICKEL UNDER PLATED
- SPECIFICATIONS:
  - CURRENT RATING:1A AC,DC
  - VOLTAGE RATING:200V AC,DC
  - WITHSTANDING VOLTAGE:500V AC/MINUTE.
  - INSULATION RESISTANCE:100MΩ MIN.
  - CONTACT RESISTANCE:40mΩ MAX.
  - OPERTING TERPERTAURE:-40°C~+80°C
- Sign"▲"is importance dimension.

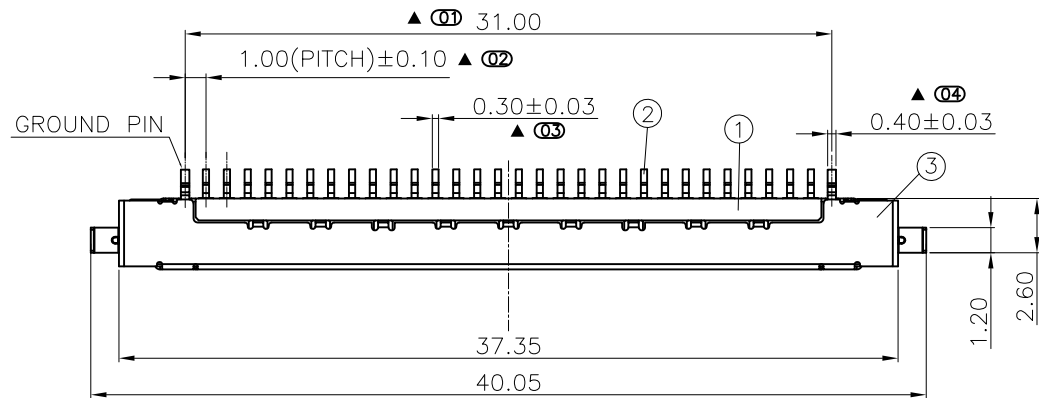

Model P/N: AFG003H-XXXX-XXXXXXX

Plastical Material	□C0:LCP UL94V-0	Packing	□R:Tape reel
Housing Color	□57:Beige	Remark	□H:H.F &RoHS2
CKTS	□30:30Pin	□R:RoHS2	□E:Upper
		□F:Lower	□F:Lower
		Plating Code	□A1:Gold flash 1u"
			□A2:Gold flash 2u"
			□A3:Gold flash 3u"
			□A6:Half Gold Tin 1u"
			□A7:Half Gold Tin 3u"
			□A8:Bright-Tin 90-120u"
			□A9:Matt-Tin 90-120u"

Tolerance	MODEL NAME: LVDS 1.0 PITCH 30P H=2.3 CONN.	DRAWING: Peter Wang
X.X ±0.30	MODEL No:AFG003H-COXX-XXXXXXX	CHECKED: David Zhou
X.XX ±0.20	SCALE	REVISION
X.XXX ±0.10	1:1	A0
Angle ±3.0°	SHEET	1/1
	DATE: 2018.06.06	APPROVED: Jacky Lee
	FILE: F/LINGYANG	
UNIT:mm	菱揚精密有限公司 Ling Yang Precision Co.,Ltd	DWG NO.AFG003H-A001