
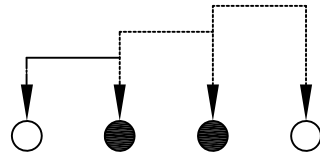


正式图 参考图




Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
---	---	NEW VERSION	Peter Wang	2018.03.12

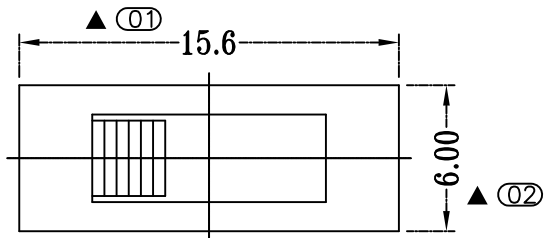

SCHEMATIC (NON-SHORTING)

NOTES:

- 1.Rating: Voltage DC50V;
- 2.Current 0.3A Max;
- 3.Contact Resistance:≤100Milliohm;
- 4.Insulation Resistance:≥100 Megohm(DC500V);
- 5.Withstand Voltage:AC500V for 1Minute, Trip Current 0.5mA Max;
- 6.Operation force:250±100g;
- 7.Operating Temperature:−25°C~+70°C;
- 8.Life test: 10000 Cycles;
- 9.Sign"▲"is importance dimension.

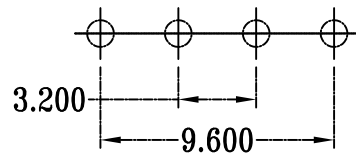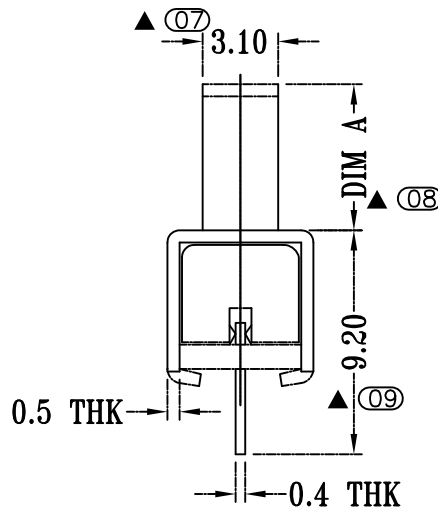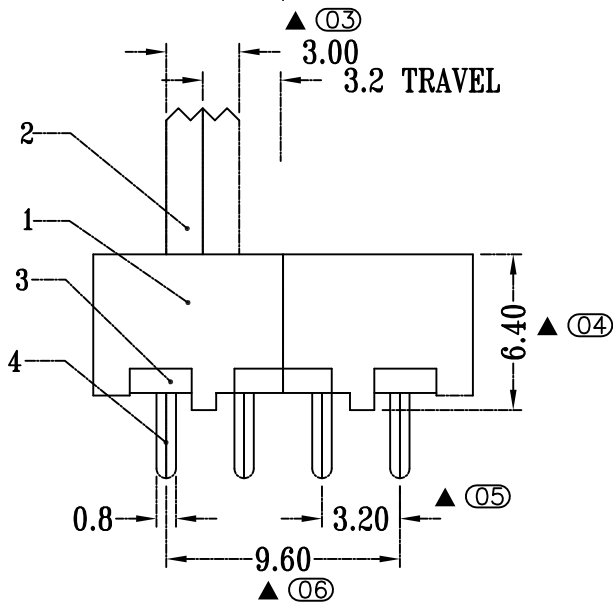

**P.C.B LAYOUT
BOTTOM VIEW**

P/N: SK13F06-XXXX-XXXXXXXX

Model P/N

Plastical Material
 PO:POM

Knob Color
 01:Black

Packing
 B:Bag

Chocolate:
 25: 250g

Plating
 0:Bright Tin;
 W:MATTE Tin;
 S:Ag;
 1:Au.

Product salt mist
 A:Normal;
 B:24Hours;

Pull digits
 3: 3

DIM A
 6:6mm

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
7	Steel ball	1	Steel	No plating	X
6	Spring	1	Steel wire	No plating	X
5	Clip	1	PBS strip	Ag plating	X
4	Terminal	4	Brass strip	Ag plating	X
3	Base	1	Phenolic resin	No plated	X
2	Knob	1	Choose from P/N	Choose from P/N color item	X
1	Frame	1	Steel strip	Ni plated	X

Tolerance	MODEL NAME:VERTICAL SLIDE SWITCH	DRAWING: Peter Wang	
X.X ±0.30	MODEL No:SK13F06-XXXX-XXXXXXXX	CHECKED: David Zhou	
X.XX ±0.20	SCALE:1:1	REVISION	SHEET
X.XXX ±0.10		A0	1/1
Angle ±3.0°	UNIT:mm	DATE: 2018.03.12	
菱揚精密有限公司 Ling Yang Precision Co.,Ltd		FILE: CD/LINGYANG	
		DWG NO.SK13F06-A001	