
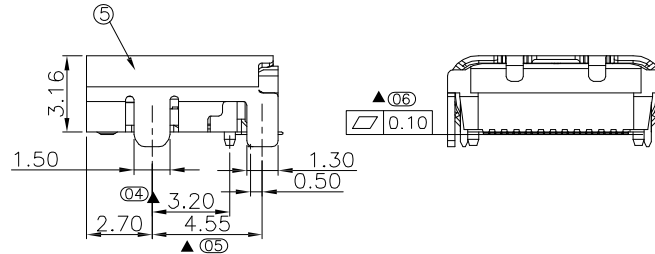




SECTION A-A

- MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 5000 CYCLES
- ELECTRICAL:
CURRENT: 3A MIN FOR VBUS;
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C
- SIGN"▲" IS IMPORTANCE DIMENSION.



NO.	CODE	MATERIAL	REMARK
2	C1	LCP UL94V-0	RoHS2 Fit
1	C0	LCP UL94V-0	RoHS2&H.F Fit


TABLE A : Plastical Material

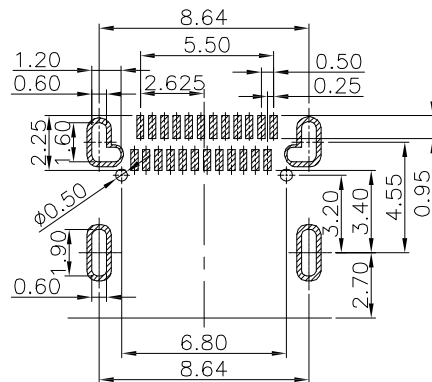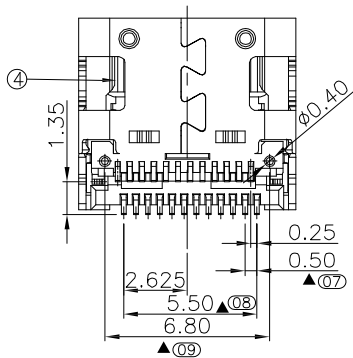

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

P/N:

UB1209W-XXXX-XXXXXXXX

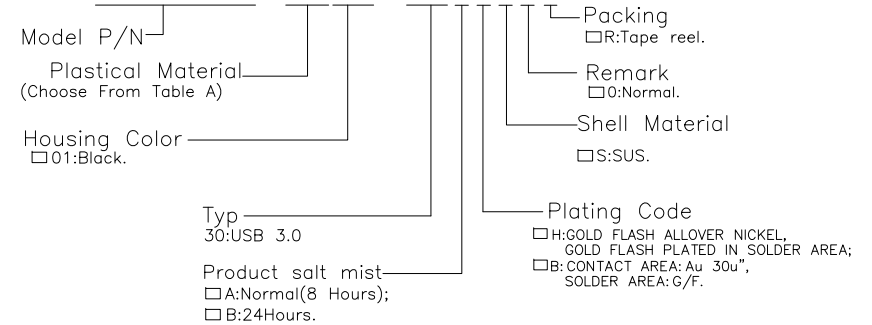

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
5	Shell	1	Stainless Steel(SUS304)	Ni 50u" MIN Plated	X
4	Middle plate	1	Stainless Steel(SUS301)	—	X
3	EMI Spring plate	1	Stainless Steel(SUS304)	Ni 50u" MIN Plated	X
2	Contact	24	Copper Alloy(C1814)	Au Plated	X
1	Housing	1	See Table A	Black	X

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	MODEL NAME:USB 3.0 90度 C TYPE MODEL No: UB1209W-XXXX-XXXXXXXX	DRAWING: Peter Wang CHECKED: David Zhou APPROVED: Jacky Lee DATE: 2018.09.29
UNIT:mm	SCALE:1:1 REVISION A0 SHEET 1/1	FILE: CD/LINGYANG DWG NO.UB1209W-A001



菱揚精密有限公司
Ling Yang Precision Co.,Ltd