

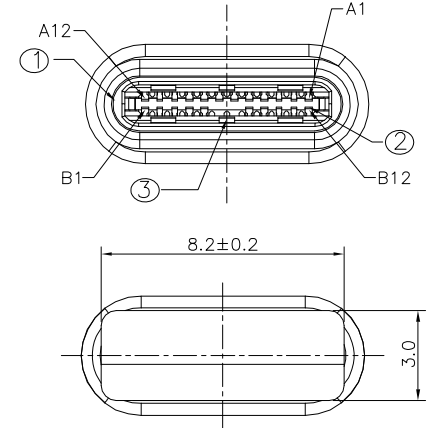
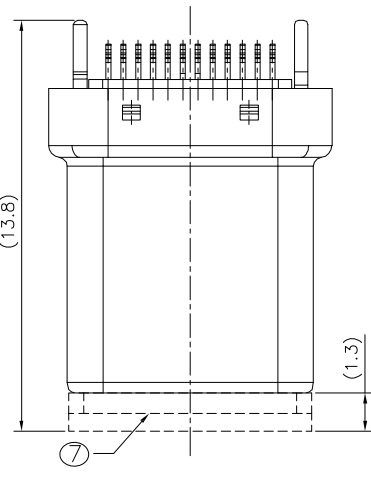
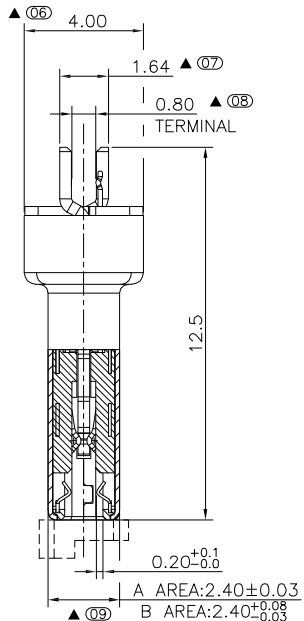


正式图 参考图

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
—	—	NEW VERSION	Peter Wang	2018.09.29

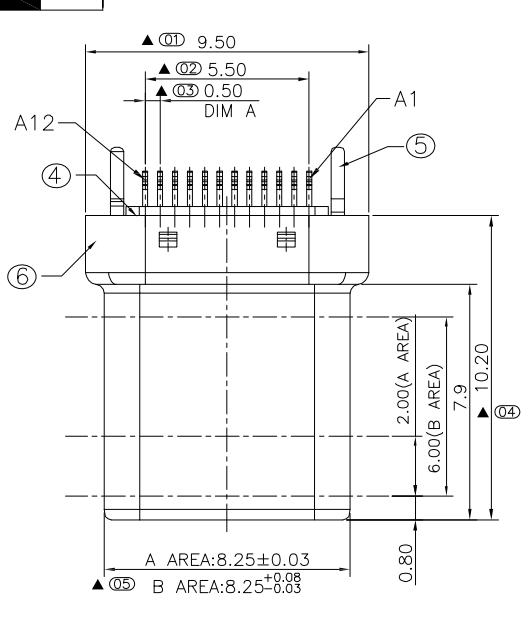

WITH STOPPER
Stainless Steel(SUS301)

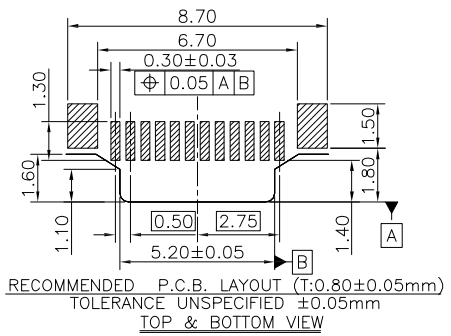

- 1.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 5000 CYCLES
- 2.ELECTRICAL:
CURRENT: 3A MIN FOR VBUS;
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
- 3.ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C
- 4.SIGN"▲"IS IMPORTANCE DIMENSION.

2	C1	LCP UL94V-0	RoHS2 Fit
1	C0	LCP UL94V-0	RoHS2&H.F Fit
NO.	CODE	MATERIAL	REMARK

TABLE A : Plastical Material

CONTACT	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
DEFINE	GND	RX2+	RX2-	VBUS	SBU1	D-	D+	CC	VBUS	TX1-	TX1+	GND
DEFINE	GND	TX2+	TX2-	VBUS	Vconn	N/A	N/A	SBU2	VBUS	RX1-	RX1+	GND
CONTACT	B1	B2	B3	B4	B5	N/A	N/A	B8	B9	B10	B11	B12

P/N:

UB1212W-XXXX-XXXXXXXX

- Model P/N
- Plastical Material (Choose From Table A)
- Housing Color (01:Black)
- Typ 30:USB 3.0
- Product salt mist (A:Normal(8 Hours); B:24Hours)
- Packing (R:Tape reel)
- Remark (0:Normal)
- Shell Material (S:SUS)
- Plating Code (H:GOLD FLASH ALLOVER NICKEL, GOLD FLASH PLATED IN SOLDER AREA; B:CONTACT AREA: Au 30u", SOLDER AREA: G/F)

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
7	Stopper	1	See Table A	—	X
6	Shell	1	Stainless Steel(SUS304)	Ni 50u" MIN Plated	X
5	Latch	1	Stainless Steel(SUS304)	Ni 50u" MIN Plated	X
4	I/M Part	1	See Table A	—	X
3	EMI Spring	1	Stainless Steel(SUS304)	—	X
2	Contact	24	Copper Alloy	Au Plated	X
1	Housing	1	See Table A	Black	X

Tolerance	MODEL NAME:USB 3.0 90度 C TYPE	DRAWING: Peter Wang
X.X ±0.30	MODEL No: UB1212W-XXXX-XXXXXXXX	CHECKED: David Zhou
X.XX ±0.20	SCALE:1:1	APPROVED: Jacky Lee
X.XXX ±0.10		REVISION A0
Angle ±3.0°	SHEET 1/1	DATE: 2018.09.29
UNIT:mm	菱揚精密有限公司 Ling Yang Precision Co.,Ltd	FILE: CD/LINGYANG DWG NO.UB1212W-A001